


# LED 2D 2PIN



## Features

- Energy saving with low power consumption
- Perfect retrofit fluorescent 2D lamps in CCG circuits
- For direct connection with AC
- Instant full brightness
- Smooth operation even at low temperatures
- No mercury and hazardous substances
- Voltage: 220-240Vac, 50/60Hz, Power Factor: 0.9
- Good color rendition, Ra  $\geq$ 80

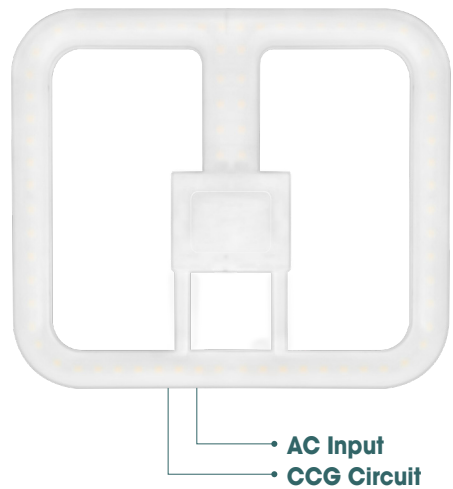


EUROPE


CFLn1

8W	~	16W
12W	~	28W
16W	~	38W


GR8 base



(Unit : mm)	(L)	(W)	(H)
8W	128	x 150	x 24
12W	182	x 211	x 24
16W	182	x 211	x 24



Model	Voltage	Wattage	Base	Color Temp	Beam Angle	Type	Lumen	
LED TP 2D/16-8W/827/2P	220 - 240V	8W	GR8	2700K	140°	AC / CCG	825lm	F
LED TP 2D/16-8W/830/2P	220 - 240V	8W	GR8	3000K	140°	AC / CCG	840lm	F
LED TP 2D/16-8W/835/2P	220 - 240V	8W	GR8	3500K	140°	AC / CCG	840lm	F
LED TP 2D/16-8W/840/2P	220 - 240V	8W	GR8	4000K	140°	AC / CCG	860lm	F
LED TP 2D/16-8W/865/2P	220 - 240V	8W	GR8	6500K	140°	AC / CCG	880lm	E
LED TP 2D/28-12W/827/2P	220 - 240V	12W	GR8	2700K	140°	AC / CCG	1235lm	F
LED TP 2D/28-12W/830/2P	220 - 240V	12W	GR8	3000K	140°	AC / CCG	1260lm	F
LED TP 2D/28-12W/835/2P	220 - 240V	12W	GR8	3500K	140°	AC / CCG	1260lm	F
LED TP 2D/28-12W/840/2P	220 - 240V	12W	GR8	4000K	140°	AC / CCG	1300lm	F
LED TP 2D/28-12W/865/2P	220 - 240V	12W	GR8	6500K	140°	AC / CCG	1320lm	E
LED TP 2D/38-16W/827/2P	220 - 240V	16W	GR8	2700K	140°	AC / CCG	1650lm	F
LED TP 2D/38-16W/830/2P	220 - 240V	16W	GR8	3000K	140°	AC / CCG	1680lm	F
LED TP 2D/38-16W/835/2P	220 - 240V	16W	GR8	3500K	140°	AC / CCG	1680lm	F
LED TP 2D/38-16W/840/2P	220 - 240V	16W	GR8	4000K	140°	AC / CCG	1730lm	F
LED TP 2D/38-16W/865/2P	220 - 240V	16W	GR8	6500K	140°	AC / CCG	1800lm	E

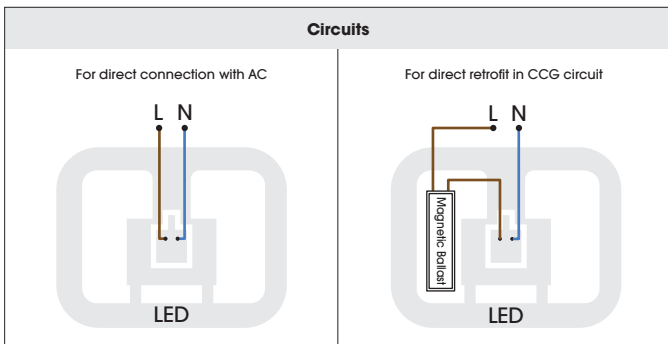

Direct 220 - 240Vac input. Integral LED driver