



LED Downlight ND421E - ND426E

Features

- 6W / 9W / 12W / 15W / 18W / 24W LED Downlight
- Recessed round, uniform distribution
- Comfort glare-free diffuser
- Ideal replacement up to 2x26W compact fluo. downlight
- Low profile and slim (only 17mm deep), suitable for shallow ceiling void
- Good color rendition, Ra ≥80

Materials / Finish


- Body: Die cast aluminium with white finish
- Trim: Die cast aluminium, UV protected
- Diffuser: Frosted PS, UV protected

Installation / Mounting

- Quick installation with mounting bracket
- Suitable for recessed mounting
- Remote gear unit allows flexible and easy installation
- Cut out dimensions Ø115mm / Ø135mm / Ø165mm / Ø185mm / Ø215mm / Ø290mm

Standards

- Designed and manufactured to comply with international standard EN60598
- Class II Electrical
- IP 20

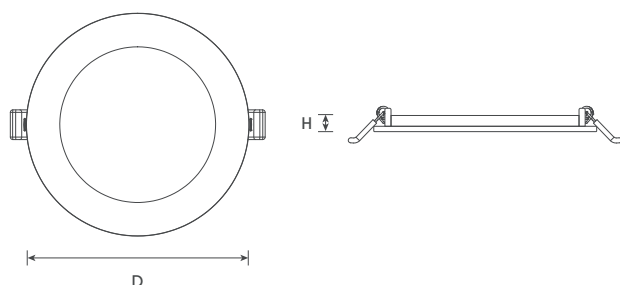

(Unit : mm)	(D)	(H)	Cut Out Dimensions
ND421E	Ø120	x 17	Ø115
ND422E	Ø145	x 17	Ø135
ND423E	Ø170	x 17	Ø165
ND424E	Ø190	x 17	Ø185
ND425E	Ø225	x 17	Ø215
ND426E	Ø300	x 17	Ø290

Model	Voltage	Luminaire Wattage	Color Temp	Beam Angle	Luminaire Lumen	ENERGY
ND421E-6W/830	220 - 240V	6W	3000K	110°	435lm	F
ND421E-6W/840	220 - 240V	6W	4000K	110°	455lm	F
ND421E-6W/865	220 - 240V	6W	6500K	110°	465lm	F
ND422E-9W/830	220 - 240V	9W	3000K	110°	710lm	F
ND422E-9W/840	220 - 240V	9W	4000K	110°	770lm	F
ND422E-9W/865	220 - 240V	9W	6500K	110°	825lm	F
ND423E-12W/830	220 - 240V	12W	3000K	110°	1045lm	F
ND423E-12W/840	220 - 240V	12W	4000K	110°	1140lm	E
ND423E-12W/865	220 - 240V	12W	6500K	110°	1235lm	E
ND424E-15W/830	220 - 240V	15W	3000K	110°	1330lm	F
ND424E-15W/840	220 - 240V	15W	4000K	110°	1425lm	E
ND424E-15W/865	220 - 240V	15W	6500K	110°	1520lm	E
ND425E-18W/830	220 - 240V	18W	3000K	110°	1615lm	F
ND425E-18W/840	220 - 240V	18W	4000K	110°	1710lm	E
ND425E-18W/865	220 - 240V	18W	6500K	110°	1805lm	E
ND426E-24W/830	220 - 240V	24W	3000K	110°	2185lm	F
ND426E-24W/840	220 - 240V	24W	4000K	110°	2280lm	E
ND426E-24W/865	220 - 240V	24W	6500K	110°	2375lm	E

