

LED Floodlight UF251E - UF254E

Features

- 10W / 20W / 30W / 50W / 100W LED Floodlight
- Polyester powder finish for excellent corrosion and UV resistance
- Designed for excellent thermal transfer to extend component life
- Uniform design with four construction sizes
- Good heat dissipation performance
- Good color rendition, Ra ≥80

Materials / Finish


- Body: Sturdy die cast aluminium housing with anodised steel bracket and extruded silicone rubber gasket
- Diffuser: Toughened glass
- Black color

Installation / Mounting

- Suitable for mast mounting and wall mounting

Standards

- Designed and manufactured to comply international standard EN60598
- Class I Electrical
- IP 66

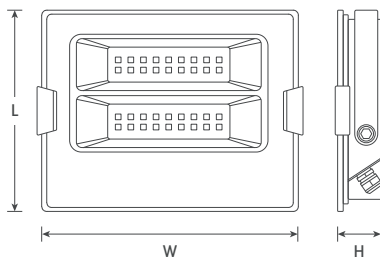

(Unit : mm)	(L)	(W)	(H)
UF251E	142 x	118 x	31
UF252E	172 x	143 x	31
UF253E	208 x	161 x	31
UF254E	293 x	213 x	33



Model	Voltage	Luminaire Wattage	Color Temp	Beam Angle	Luminaire Lumen	ENERGY
UF251E-10W/830	220 - 240V	10W	3000K	105° x 73°	685lm	G
UF251E-10W/840	220 - 240V	10W	4000K	105° x 73°	720lm	G
UF251E-10W/865	220 - 240V	10W	6500K	105° x 73°	760lm	F
UF252E-20W/830	220 - 240V	20W	3000K	105° x 73°	1520lm	F
UF252E-20W/840	220 - 240V	20W	4000K	105° x 73°	1570lm	F
UF252E-20W/865	220 - 240V	20W	6500K	105° x 73°	1615lm	F
UF252E-30W/830	220 - 240V	30W	3000K	105° x 73°	2350lm	F
UF252E-30W/840	220 - 240V	30W	4000K	105° x 73°	2420lm	F
UF252E-30W/865	220 - 240V	30W	6500K	105° x 73°	2500lm	F
UF253E-50W/830	220 - 240V	50W	3000K	105° x 73°	4000lm	F
UF253E-50W/840	220 - 240V	50W	4000K	105° x 73°	4250lm	F
UF253E-50W/865	220 - 240V	50W	6500K	105° x 73°	4500lm	F
UF254E-100W/830	220 - 240V	100W	3000K	105° x 73°	8200lm	F
UF254E-100W/840	220 - 240V	100W	4000K	105° x 73°	8350lm	F
UF254E-100W/865	220 - 240V	100W	6500K	105° x 73°	8500lm	F

