

LED T5 AC HPF

8W/12W/14W/16W/20W/25W


Features

- Energy saving with low power consumption
- High efficacy up to 150lm/W
- Smooth operation even at low temperatures
- No mercury and hazardous substances
- Full glass body
- Voltage: 100-277Vac, 50/60Hz, Power Factor: 0.9
- Good color rendition, Ra ≥80




Diagrams



Dimensions:

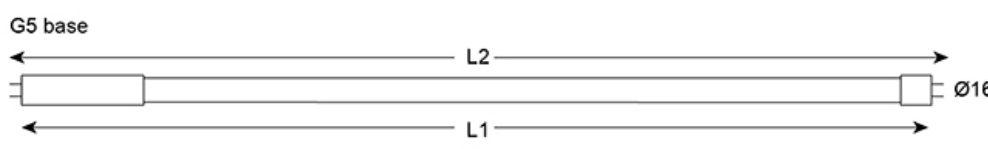		(Unit : mm)	(L1)	(L2)
	8W, 14W	549	563	
	12W, 20W	849	863	
	14W, 25W	1149	1163	
	20W, 25W	1449	1463	

Circuits:

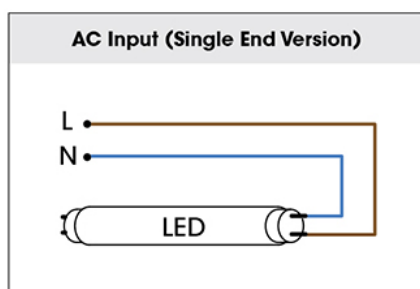

Direct 100 - 277Vac input. Integral LED driver

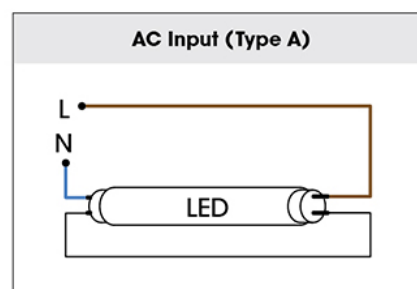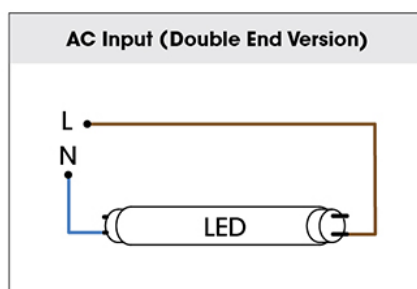

Prosperity Lamps & Components Ltd.

Tel: (852) 2511 0022 Fax: (852) 2511 0082 Web: www.prosperitylamps.com Email: info@prosperitylamps.com

Standards



IP20



Applications



Home



Office



Shopping mall



Hotel



Supermarket



Restaurant



Parking



School



Warehouse



Factory



Hospital



Gallery



Museum



Airport



Station

Technical Data

Type of Light Source

Lighting Technology Used LED

Non-directional or Directional [NDLS/DLS] NDLS

Mains or Non-mains [MLS/NMLS] MLS

Connected Light Source No

Color tunable light source No

Envelop [No/Second/Non-Clear] No

High Luminance Light Source No

Anti-glare Shield No

Electrical

Rated Wattage [W] 8W / 12W / 14W / 16W / 20W / 25W

On-mode Power [W] 8W / 12W / 14W / 16W / 20W / 25W

Standby Power [W] N/A

Networked Standby Power [W] N/A

Rated Voltage [V/Hz] 100-277Vac, 50/60Hz

Power Factor @230V 0.85 / 0.85 / 0.85 / 0.85 / 0.9 / 0.9

Input Current [mA] @230V 41 / 61 / 72 / 82 / 97 / 121

Model

LED F8T5/AC/8XX/600/L 8W

LED F14T5/AC/8XX/600/L 14W

LED F12T5/AC/8XX/900/L 12W

Prosperity Lamps & Components Ltd.

Tel: (852) 2511 0022 Fax: (852) 2511 0082 Web: www.prosperitylamps.com Email: info@prosperitylamps.com

LED F20T5/AC/8XX/900/L	20W
LED F16T5/AC/8XX/1200/L	16W
LED F25T5/AC/8XX/1200/L	25W
LED F20T5/AC/8XX/1500/L	20W
LED F25T5/AC/8XX/1500/L	25W
Luminous Flux [lm]	
8W	1160lm @3000K
	1180lm @4000K
	1200lm @6500K
12W	1740lm @3000K
	1770lm @4000K
	1800lm @6500K
14W	2030lm @3000K
	2065lm @4000K
	2100lm @6500K
16W	2320lm @3000K
	2370lm @4000K
	2400lm @6500K
20W	2900lm @3000K
	2950lm @4000K
	3000lm @6500K
25W	3630lm @3000K
	3690lm @4000K
	3750lm @6500K
Performance	
SDCM	<6
Chromaticity coordinates [x, y]	0.44, 0.403@3000K
	0.38,0.38@4000K
	0.312, 0.335@6500K
Efficacy [lm/W]	145-150
Color Rendering Index [Ra]	≥80
R9 colour rendering index value	2
Beam Angle [°]	270
Rated Life, Ta@25°C [hrs]	40,000
Survival Factor	0.9
Lumen Maintenance Factor	0.96
Number of Switching Cycles Before Failure	>15,000
Starting Time [S]	<0.5
Warm Up Time [S]	<2
Premature Failure At 1000hrs	<5%
Displacement Factor [cosØ]	0.5 - 0.9
Flicker Metric [Pst LM]	1
Stroboscopic Effect Metric [SVM]	0.4
Mechanical	

Prosperity Lamps & Components Ltd.

Tel: (852) 2511 0022 Fax: (852) 2511 0082 Web: www.prosperitylamps.com Email: info@prosperitylamps.com

Diameter D [mm]	Φ16
Length L1 [mm]	549 (8W,14W) / 849 (12W,20W) / 1149 (16W,25W) / 1449 (20W,25W)
Length L2 [mm]	563 (8W,14W) / 863 (12W,20W) / 1163 (16W,25W) / 1463 (20W,25W)
Base	G5
Material	Glass
Standard Compliance	
CE-LVD	EN62776
CE-EMC	EN55015, EN61547, EN61000-3-2, EN61000-3-3
CE-EMF	EN62493
Environment	RoHS
Mercury Content [mg]	0.0
Energy Class	D
Other	
Dimmable [Yes/Only with specific dimmers/No]	No
Operation Temperature	-20°C ~ 45°C
Storage Temperature	-10°C ~ 30°C
Energy Consumption in on-mode [kWh/1000h]	8kWh / 12kWh / 14kWh / 16kWh / 20kWh / 25kWh