

LED Wall Pack UF101E-104E

30W/60W/90W/120W


Features

- 30W / 60W / 90W / 120W LED Wall Pack
- Fixture surface especially treated with antisatic, thermostable and anti-corrosive paint
- High efficacy >110lm/W
- Uniform light output
- Good color rendition, Ra ≥80



Diagrams

Dimensions:

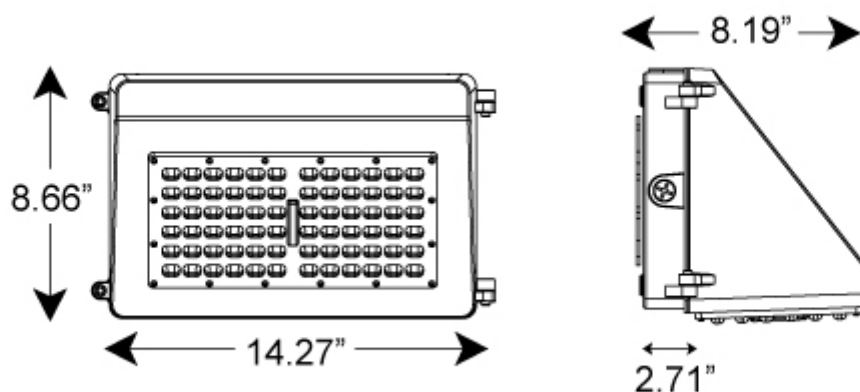


Prosperity Lamps & Components Ltd.

Tel: (852) 2511 0022 Fax: (852) 2511 0082 Web: www.prosperitylamps.com Email: info@prosperitylamps.com

Full Cut Off Version:




Accessories:

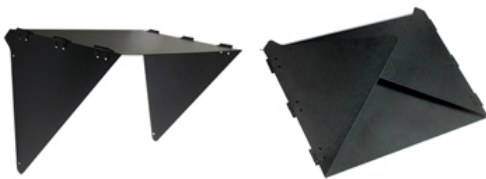

Hood



Photo Control



Milky diffuser



Wall Mount

Prosperity Lamps & Components Ltd.

Tel: (852) 2511 0022 Fax: (852) 2511 0082 Web: www.prosperitylamps.com Email: info@prosperitylamps.com

©2026 Prosperity Lamps & Components Ltd. All rights reserved

Standards

**IP65**

Applications



Parking



Warehouse



Station

Technical Data

Electrical

Rated Wattage [W] 30W / 60W / 90W / 120W

Rated Voltage [V/Hz] 100-277Vac, 50/60Hz

Power Factor @120V 0.9

Input Current [mA] @120V 278 / 556 / 833 / 1111

Model

UF101E-30W/8XX 30W

UF102E-60W/8XX 60W

UF103E-90W/8XX 90W

UF104E-120W/8XX 120W

Luminous Flux [lm]

30W 3150lm @3000K

3200lm @4000K

3300lm @5000K

60W 6450lm @3000K

6500lm @4000K

6600lm @5000K

90W 9700lm @3000K

9800lm @4000K

9900lm @5000K

120W 12500lm @3000K

13000lm @4000K

13200lm @5000K

Performance

SDCM <6

Estimated Yearly Energy Cost [\$USD] 3.61 / 7.23 / 10.84 / 14.45

Luminous Efficacy [lm/W] 104-110

Color Rendering Index [Ra] ≥80

Prosperity Lamps & Components Ltd.

Tel: (852) 2511 0022 Fax: (852) 2511 0082 Web: www.prosperitylamps.com Email: info@prosperitylamps.com

Color Maintenance [hr]	>6000
Luminous Intensity Distribution [°]	125x46
Life [Yrs] (based on 3hrs/day)	46
Lumen Maintenance at 6000hrs	>0.8
Rapid Cycle Stress	>15,000 cycles
Start Time [sec]	<0.5
LED Failure	<5%
Mechanical	
Length L [in]	14.27
Width W [in]	8.66
Height H [in]	8.19
Material	Body: Die-casting aluminium housing with anti-corrosive, thermostable finish
	Chips: Lumileds / Samsung
Standard Compliance	
ANSI	UL8750, UL1993, UL1598, C82.77-2002, C78.377-2008
FCC	FCC CFR Part 15, FCC CFR Part 18
Mercury Content [mg]	0.0
Other	
Dimmable [Y/N]	N
Operation Temperature	-20°C ~ 50°C
Storage Temperature	-10°C ~ 30°C