

# Smart Thermal Plastic LED GU10

## 4.5W


### Features

- Extremely energy saving with low power consumption
- Ideal retrofit of traditional lamps with same appearance / performance / dimensions
- Vivid and multiple color changing with over 16 million colors
- Work with both mobile and most common smart home devices via Amazon Alexa, Google Home Assistant and Apple HomeKit
- Control in a group or individually and customize your own lighting preferences
- Customize timer schedule to optimize energy efficiency
- Remote control the lamps from anywhere and anytime
- Tunable White from 2700K to 6500K
- Support Matter protocol
- Smooth dimming range from 1% to 100%
- Good color rendition, Ra ≥ 80



### Diagrams

#### Dimensions:

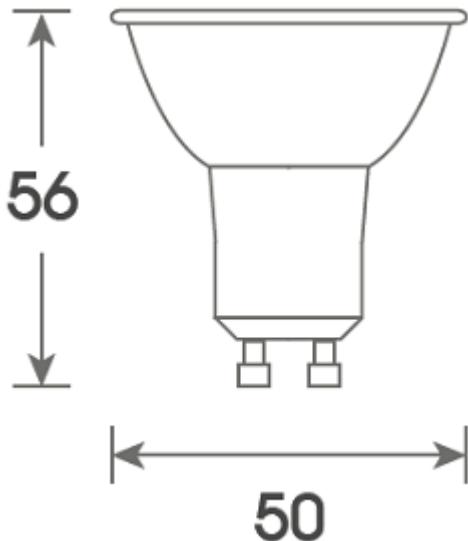

Prosperity Lamps & Components Ltd.

Tel: (852) 2511 0022 Fax: (852) 2511 0082 Web: [www.prosperitylamps.com](http://www.prosperitylamps.com) Email: [info@prosperitylamps.com](mailto:info@prosperitylamps.com)

Smart Control:



## Standards



## Applications



Home



Office



Shopping mall



Hotel



Supermarket



Restaurant



Gallery



Museum

## Technical Data

### Type of Light Source

Lighting Technology Used	LED
--------------------------	-----

Non-directional or Directional [NDLS/DLS]	DLS
---	-----

Mains or Non-mains [MLS/NMLS]	MLS
-------------------------------	-----

Connected Light Source	Yes
------------------------	-----

Color tunable light source	Yes
----------------------------	-----

Envelop [No/Second/Non-Clear]	No
-------------------------------	----

High Luminance Light Source	No
-----------------------------	----

Anti-glare Shield	No
-------------------	----

### Electrical

Rated Wattage [W]	4.5W
-------------------	------

On-mode Power [W]	4.5W
-------------------	------

Standby Power [W]	0.5W
-------------------	------

Networked Standby Power [W]	0.5W
-----------------------------	------

Rated Voltage [V/Hz]	220-240Vac, 50/60Hz
----------------------	---------------------

Power Factor @230V	0.5
--------------------	-----

Input Current [mA] @230V	39
--------------------------	----

### Model

LED-SMT TP GU10 4.5W TW DIM	4.5W
-----------------------------	------

Prosperity Lamps &amp; Components Ltd.

Tel: (852) 2511 0022 Fax: (852) 2511 0082 Web: [www.prosperitylamps.com](http://www.prosperitylamps.com) Email: [info@prosperitylamps.com](mailto:info@prosperitylamps.com)

LED-SMT TP GU10 4.5W RGBTW DIM	4.5W
Luminous Flux (Useful Luminous Flux) [lm]	
4.5W	355lm (345lm)
<b>Performance</b>	
SDCM	<6
Chromaticity coordinates [x, y]	0.463, 0.42@2700K / 0.312, 0.335@6500K
Efficacy [lm/W]	77
Color Rendering Index [Ra]	≥80
R9 colour rendering index value	2
Beam Angle [°]	45
Rated Life, Ta@25°C [hrs]	15,000
Lamp Survival Factor	0.9
Lumen Maintenance	0.93
Number of Switching Cycles Before Failure	>7,500
Starting Time [S]	<0.5
Warm Up Time [S]	<2
Premature Failure At 1000hrs	<5%
Displacement Factor [cosØ]	0.5
Flicker Metric [Pst LM]	1
Stroboscopic Effect Metric [SVM]	0.4
<b>Mechanical</b>	
Diameter D [mm]	Φ50
Height H [mm]	56
Base	GU10
Material	Thermal Plastic
<b>Standard Compliance</b>	
CE-LVD	EN62560
CE-EMC	EN55015, EN61547, EN61000-3-2, EN61000-3-3
CE-EMF	EN62493
Environment	RoHS
Mercury Content [mg]	0.0
Energy Class	F
<b>Other</b>	
Dimmable [Y/N]	Y
Operation Temperature	-20°C ~ 50°C
Storage Temperature	-10°C ~ 30°C
Claim of Equivalent Power, 4.5W [W]	50W
Energy Consumption in on-mode [kWh/1000h]	5kWh