




LED PLL AC

Features

- Energy saving with low power consumption
- LED PLL is not suitable for ECG Circuit. The ECG should be bypassed for AC connection
- For direct connection with AC
- Instant full brightness
- Smooth operation even at low temperatures
- No mercury and hazardous substances
- Full glass body
- Voltage: 220-240Vac, 50/60Hz, Power Factor: 0.5
- Good color rendition, Ra ≥80

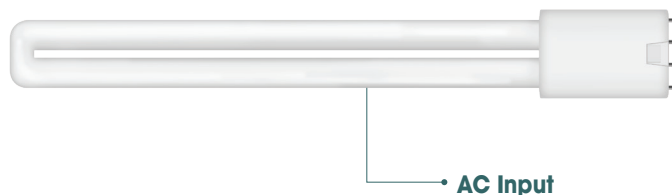


AC Input

EUROPE


CFLni

8W	~	18W
12W	~	24W
18W	~	36W
20W	~	40W
24W	~	55W

2G11 base

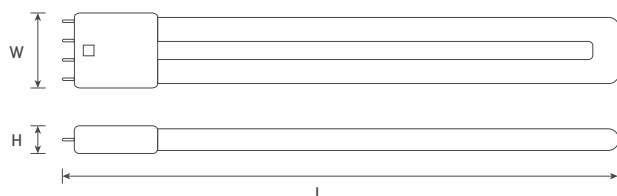

(Unit : mm)	(L)	(W)	(H)
8W	230	x 44	x 24
12W	320	x 44	x 24
18W	410	x 44	x 24
20W	530	x 44	x 24
24W	530	x 44	x 24



Model	Voltage	Wattage	Base	Color Temp	Beam Angle	Type	Lumen	
LED PLL/18-8W/AC/830/G	220 - 240V	8W	2G11	3000K	270°	AC	950lm	E
LED PLL/18-8W/AC/840/G	220 - 240V	8W	2G11	4000K	270°	AC	975lm	E
LED PLL/18-8W/AC/865/G	220 - 240V	8W	2G11	6500K	270°	AC	1000lm	E
LED PLL/24-12W/AC/830/G	220 - 240V	12W	2G11	3000K	270°	AC	1450lm	E
LED PLL/24-12W/AC/840/G	220 - 240V	12W	2G11	4000K	270°	AC	1475lm	E
LED PLL/24-12W/AC/865/G	220 - 240V	12W	2G11	6500K	270°	AC	1500lm	E
LED PLL/36-18W/AC/830/G	220 - 240V	18W	2G11	3000K	270°	AC	2200lm	E
LED PLL/36-18W/AC/840/G	220 - 240V	18W	2G11	4000K	270°	AC	2250lm	E
LED PLL/36-18W/AC/865/G	220 - 240V	18W	2G11	6500K	270°	AC	2300lm	E
LED PLL/40-20W/AC/830/G	220 - 240V	20W	2G11	3000K	270°	AC	2450lm	E
LED PLL/40-20W/AC/840/G	220 - 240V	20W	2G11	4000K	270°	AC	2500lm	E
LED PLL/40-20W/AC/865/G	220 - 240V	20W	2G11	6500K	270°	AC	2550lm	E
LED PLL/55-24W/AC/830/G	220 - 240V	24W	2G11	3000K	270°	AC	3100lm	E
LED PLL/55-24W/AC/840/G	220 - 240V	24W	2G11	4000K	270°	AC	3200lm	E
LED PLL/55-24W/AC/865/G	220 - 240V	24W	2G11	6500K	270°	AC	3300lm	D

New installation / ECG rewiring AC Input



Direct 220 - 240V AC input. Integral LED driver

This LED PLL is not suitable for ECG Circuit. Please bypass the ECG for AC connection