




LED T8 3CCT Type A/B/SE

Features


- Energy saving with low power consumption
- Perfect retrofit traditional lamps with no change on dimensions
- Selectable CCT via dip-switch
- Inventory cost saving
- Type A/B is for direct retrofit of magnetic ballast circuit
- Smooth operation even at low temperatures
- No mercury and hazardous substances
- Full glass body
- Voltage: 220-240Vac, 50/60Hz, Power Factor: 0.9
- High efficacy up to 120lm/W
- Good color rendition, Ra ≥80

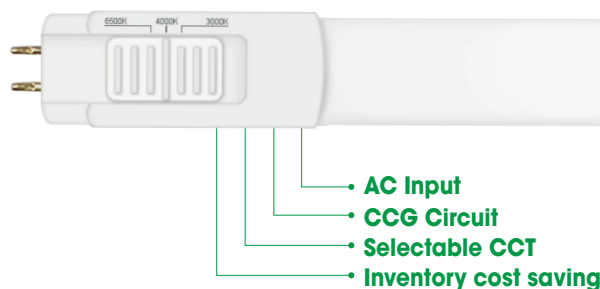


EUROPE

TUBE

G13 base	L2	(Unit : mm)	(L1)	(L2)
Ø29	Ø26	9W	588	602
		18W	1198	1212
		22W	1500	1513
		30W	1764	1778
	L1			



Model	Voltage	Wattage	Color Temp	Beam Angle	Type	Efficacy	Lumen	
LED F9T8/8XX/G/600/3CCT	220 - 240V	9W	3000K - 4000K - 6500K	280°	A / B / SE	100lm/W / 110lm/W	900lm / 990lm / 990lm	E
LED F18T8/8XX/G/1200/3CCT	220 - 240V	18W	3000K - 4000K - 6500K	280°	A / B / SE	105lm/W / 110lm/W	1900lm / 1980lm / 1980lm	E
LED F22T8/8XX/G/1500/3CCT	220 - 240V	22W	3000K - 4000K - 6500K	280°	A / B / SE	105lm/W / 110lm/W	2320lm / 2420lm / 2420lm	E
LED F30T8/8XX/G/1800/3CCT	220 - 240V	30W	3000K - 4000K - 6500K	280°	A / B / SE	110lm/W / 120lm/W	3300lm / 3600lm / 3600lm	E

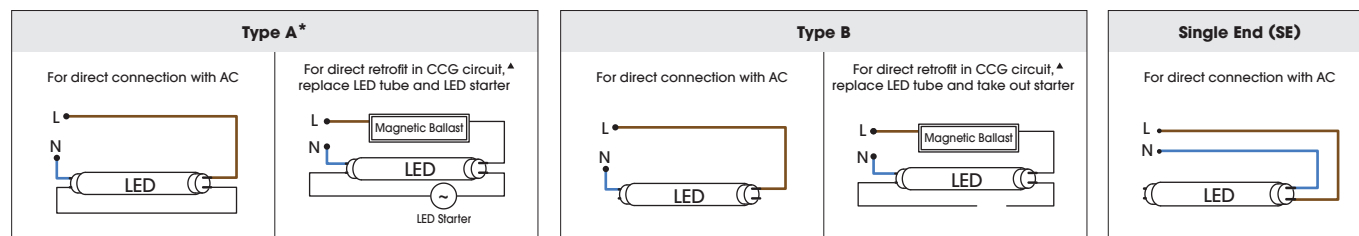

* Comply to EN62776

▲ Recommend to remove the parallel capacitor (if any) to achieve HPF