

## LED Floodlight UF241E - UF245E

### Features

- 20W / 30W / 50W / 100W / 150W / 200W LED Floodlight
- Polyester powder finish for excellent corrosion and UV resistance
- Designed for excellent thermal transfer to extend component life
- Uniform design with five construction sizes
- Good heat dissipation performance
- Good color rendition, Ra  $\geq 80$

### Materials / Finish


- Body: Sturdy die cast aluminium housing with anodised steel bracket and extruded silicone rubber gasket
- Diffuser: Toughened glass
- Black color

### Installation / Mounting

- Suitable for mast mounting and wall mounting

### Standards

- Designed and manufactured to comply international standard EN60598
- Class I Electrical
- IP 65

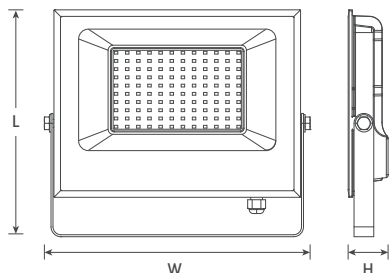

	(Unit : mm)	(L)	(W)	(H)
<b>UF241E</b>	140 x	145	x	35
<b>UF242E</b>	173 x	196	x	40
<b>UF243E</b>	230 x	269.5	x	40
<b>UF244E</b>	292 x	339.5	x	42
<b>UF245E</b>	331 x	404	x	43.5



Model	Voltage	Luminaire Wattage	Color Temp	Beam Angle	Luminaire Lumen	
UF241E-20W/830	220 - 240V	20W	3000K	115°	1520lm	F
UF241E-20W/840	220 - 240V	20W	4000K	115°	1570lm	F
UF241E-20W/865	220 - 240V	20W	6500K	115°	1615lm	F
UF241E-30W/830	220 - 240V	30W	3000K	115°	2470lm	F
UF241E-30W/840	220 - 240V	30W	4000K	115°	2520lm	F
UF241E-30W/865	220 - 240V	30W	6500K	115°	2565lm	F
UF242E-50W/830	220 - 240V	50W	3000K	115°	4130lm	F
UF242E-50W/840	220 - 240V	50W	4000K	115°	4200lm	F
UF242E-50W/865	220 - 240V	50W	6500K	115°	4275lm	F
UF243E-100W/830	220 - 240V	100W	3000K	115°	8265lm	F
UF243E-100W/840	220 - 240V	100W	4000K	115°	8410lm	F
UF243E-100W/865	220 - 240V	100W	6500K	115°	8550lm	F
UF244E-150W/830	220 - 240V	150W	3000K	115°	12400lm	F
UF244E-150W/840	220 - 240V	150W	4000K	115°	12610lm	F
UF244E-150W/865	220 - 240V	150W	6500K	115°	12825lm	F
UF245E-200W/830	220 - 240V	200W	3000K	115°	16530lm	F
UF245E-200W/840	220 - 240V	200W	4000K	115°	16815lm	F
UF245E-200W/865	220 - 240V	200W	6500K	115°	17100lm	F