


LED A MAXI SA10 200W/300W/400W




图表

尺寸:

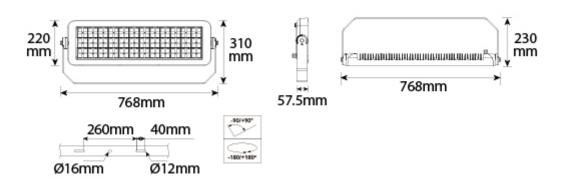

光学图:

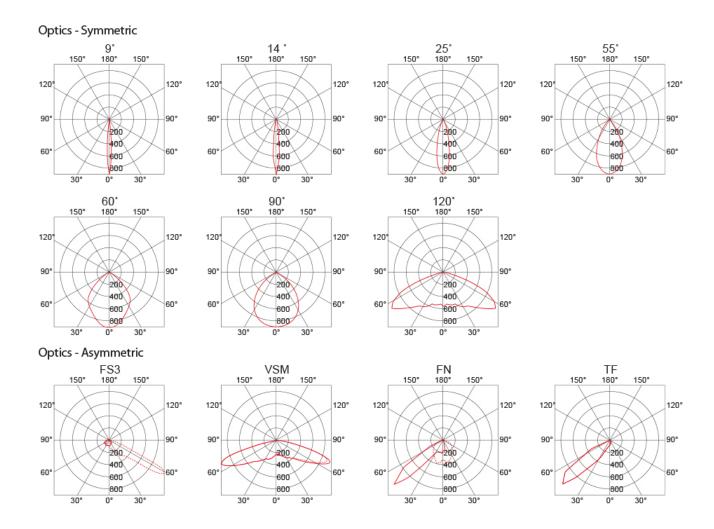

配件:



Adjustable bracket



M16 waterproof lock



Tilt-adjustable module



Safety steel wire rope



External gear box



Die-cast aluminium bracket

标准







IP65 IK08



应用





体育馆

技术参数



定功率 [W]	200W / 300W / 400W
i定电压 [VHz]	90-305 / 170-305Vac, 50/60Hz
字因数 @230V	0.9
入电流 [mA] @230V	0.97 / 1.45 / 1.93
.D	SMD
유 교 무	on b
D A MAXI SA10	200W / 300W / 400W
通量 []m]	
OW	260001m @4000K
	266001m @5700K
OW	360001m @4000K
	369001m @5700K
OOW	440001m @4000K
	452001m @5700K
效性能	
	<6
效 [lm/W]	110-133
色指数 [Ra]	≥70 / 80 / 90
束角 [°]	Depend on lens
定寿命, Ta@25° C [hrs]	50,000 (L80/B10)
00小时后,灯残存率	>0.9
00小时后,光通维持率	>0.8
关次数	>25,000
h时间 [S]	<0.5
热时间 [S]	<2
00小时后,失效率	<5%
计和物料	
E L [mm]	768
₹ W [mm]	230
度 H [mm]	310
料	Housing : ADC12 die-cast aluminium
	Diffuser : High transparency tempered glass
	Gasket : Heat-resistant silicone
	Bracket : ADC12 die—cast aluminium
准	
-LVD	EN60598-1, EN60598-2-5
-EMC	EN55015, EN61547, EN61000-3-2, EN61000-3-3
含量 [mg]	0.0
器保护等级	I
也	
光 [Y/N]	Υ
作温度	−30° C ~ 45° C

电话: (852) 2511 0022 传真: (852) 2511 0082 网址: www.prosperitylamps.com 电子邮件: info@prosperitylamps.com