



LED 高棚灯 NH151E-154E 120V
100W/150W/200W/240W

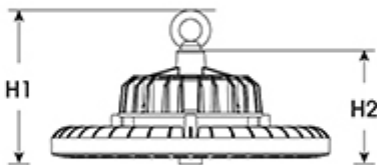

图表

尺寸:

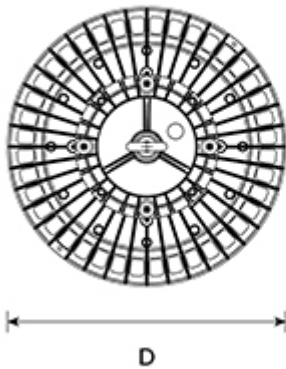

(Unit : inch)	(D)		(H1)		(H2)
NH151E	9.84	x	5.47	x	4.06
NH152E	9.84	x	5.47	x	4.06
NH153E	9.84	x	5.94	x	4.53
NH154E	11.81	x	6.34	x	4.92

反光罩:



PC 60°
100W: Ø12.20" x 6.56"
150W: Ø12.13" x 4.72"
200W: Ø16.14" x 8.29"
240W: Ø16.14" x 8.29"



ALU 90°
100W: Ø13.39" x 4.53"
150W: Ø14.57" x 5.12"
200W: Ø16.93" x 5.31"
240W: Ø16.93" x 5.31"

标准



应用



仓库

技术参数	
电参数	
额定功率 [W]	100W / 150W / 200W / 240W
额定电压 [V/Hz]	100-277Vac, 50/60Hz
功率因数 @230V	0.9
输入电流 [mA] @120V	926 / 1389 / 1500 / 2222
LED	SMD
产品型号	
NH151E-100W/8XX	100W
NH152E-150W/8XX	150W
NH153E-200W/8XX	200W
NH154E-240W/8XX	240W
光通量 [lm]	
100W	14000lm @3000K
	14500lm @4000K
	15000lm @6500K

150W	21000lm @3000K
	21750lm @4000K
	22500lm @6500K
200W	28000lm @3000K
	29000lm @4000K
	30000lm @6500K
240W	33600lm @3000K
	34800lm @4000K
	36000lm @6500K
性能	
色容差	<6
预计每年能源支出 [\$USD]	12.05 / 18.07 / 24.1 / 28.9
光效 [lm/W]	140-150
显色指数 [Ra]	≥80
色效维持 [hr]	>6000
光度分布 [°]	120
寿命 [yrs] (每日使用3小时)	46
6000小时后, 光通维持率	>0.8
开关测试	>15,000 cycles
启动时间 [S]	<0.5
LED 失效率	<5%
尺寸和物料	
直径 D [in]	Φ9.84 / Φ9.84 / Φ9.84 / Φ11.81
高度 H [in]	5.47 / 5.47 / 5.94 / 6.34
物料	Body: Die-cast Aluminium
	Lens: PC
	Reflector(optional): PC / Aluminium
标准	
ANSI	UL8750, UL1993, C82.77-2002, C78.377-2008
FCC	FCC CFR Part 15
汞含量 [mg]	0.0
其他	
调光 [Y/N]	N
工作温度	-10° C ~ 40° C
存储温度	-20° C ~ 60° C