


LED 高棚灯 NH1020-1024 120V
60W/80W/100W/150W/200W



图表

尺寸:

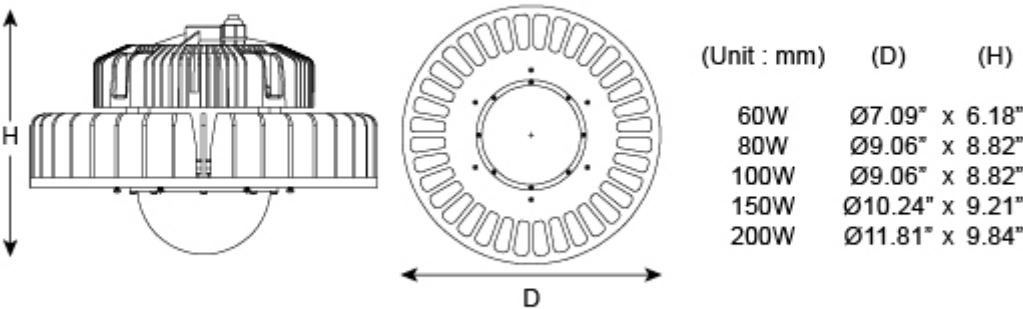

反光罩:



标准



应用



技术参数	
电参数	
额定功率 [W]	60W / 80W / 100W / 150W / 200W
额定电压 [V/Hz]	90-305Vac, 50/60Hz
功率因数 @120V	0.95
输入电流 [mA] @120V	526 / 702 / 877 / 1320 / 1750
LED	SMD
产品型号	
NH1020-3-ALB060-02	60W 3000K
NH1020-3-ALD060-02	60W 4000K
NH1020-3-ALG060-02	60W 6500K
NH1021-3-ALB080-02	80W 3000K
NH1021-3-ALD080-02	80W 4000K
NH1021-3-ALG080-02	80W 6500K
NH1022-3-ALB100-02	100W 3000K
NH1022-3-ALD100-02	100W 4000K
NH1022-3-ALG100-02	100W 6500K
NH1023-3-ALB150-02	150W 3000K

NH1023-3-ALD150-02	150W 4000K
NH1023-3-ALG150-02	150W 6500K
NH1024-3-ALB200-02	200W 3000K
NH1024-3-ALD200-02	200W 4000K
NH1024-3-ALG200-02	200W 6500K
光通量 [lm]	
60W	6800lm @3000K
	7200lm @6500K
	7500lm @6500K
80W	9000lm @3000K
	9800lm @4000K
	10400lm @6500K
100W	11400lm @3000K
	12200lm @4000K
	13000lm @4000K
150W	17500lm @3000K
	18500lm @4000K
	19500lm @4000K
200W	24000lm @3000K
	25000lm @4000K
	26000lm @4000K
性能	
色容差	<6
预计每年能源支出 [\$USD]	7.23 / 9.64 / 12.05 / 18.07 / 24.09
光效 [lm/W]	113-130
显色指数 [Ra]	≥70
色效维持 [hr]	>6000
光度分布 [°]	125
寿命 [yrs] (每日使用3小时)	46
6000小时后, 光通维持率	>0.8
开关测试	>15,000 cycles
启动时间 [S]	<0.5
LED 失效率	<5%
尺寸和物料	
直径 D [in]	Φ7.09 / Φ9.06 / Φ9.06 / Φ10.24 / Φ11.81
高度 H [in]	6.18 / 8.82 / 8.82 / 9.21 / 9.84
物料	Body: Die-cast Aluminium
	Lens: PC
	Reflector (optional): Anodised aluminium
	Chips: Lumileds 3030
	Driver: Meanwell / Sosen
标准	
ANSI	UL8750, UL1993, C82.77-2002, C78.377-2008
FCC	FCC CFR Part 15
汞含量 [mg]	0.0
其他	
调光 [Y/N]	Y
工作温度	-10° C ~ 40° C

存储温度

-20° C ~ 60° C

佑昌灯光器材有限公司

电话: (852) 2511 0022 传真: (852) 2511 0082 网址: www.prosperitylamps.com 电子邮件: info@prosperitylamps.com

©2026 佑昌灯光器材有限公司 保留所有权利