

# LED 吸顶灯 NC211E-214E

## 14W/20W/24W/32W


### 特点

- 14W / 20W / 24W / 32W LED 吸顶灯
- 乳白罩, 均匀光分布
- 遮光防眩
- 良好的演色性, Ra ≥80



### 图表

尺寸:

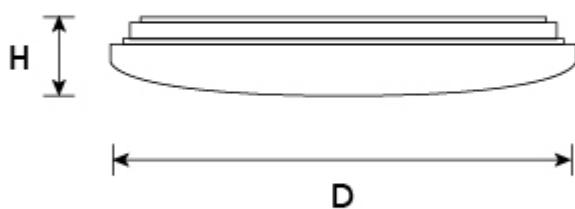

	(Unit : mm)	(D)	(H)
<b>NC211E</b>	Ø260	x	52
<b>NC212E</b>	Ø300	x	52
<b>NC213E</b>	Ø334	x	52
<b>NC214E</b>	Ø376	x	52

## 标准



IP20

IP44

## 应用



家居



旅馆



餐厅



艺术馆



铁路

## 技术参数

## 光源类型

使用的照明技术	LED
非定向或定向 [NDLS/DLS]	DLS
市电或非市电 [MLS/NMLS]	MLS
连接光源	No
可调色光源	No
灯罩 [No/Second/Non-Clear]	No
高亮度光源	No
防眩光罩	No

## 电参数

额定功率 [W]	14W / 20W / 24W / 32W
开启模式功率 [W]	14W / 20W / 24W / 32W
待机功率 [W]	N/A
网络待机功率 [W]	N/A
额定电压 [V/Hz]	220–240V, 50/60Hz
功率因数	0.9
输入电流 [mA] @230V	68 / 97 / 116 / 155

## 产品型号

NC211E-14W/8XX	14W
NC212E-20W/8XX	20W
NC213E-24W/8XX	24W
NC214E-32W/8XX	32W

## 光通量 (有效光通量) [lm]

14W	11651lm (11051lm) @3000K
	11901lm (11301lm) @4000K
	12301lm (11701lm) @6500K
20W	16601lm (15801lm) @3000K
	17001lm (16151lm) @4000K
	17601lm (16701lm) @6500K
24W	19901lm (18901lm) @3000K
	20401lm (19401lm) @4000K
	21101lm (20001lm) @6500K

佑昌灯光器材有限公司

电话: (852) 2511 0022 传真: (852) 2511 0082 网址: [www.prosperitylamps.com](http://www.prosperitylamps.com) 电子邮件: [info@prosperitylamps.com](mailto:info@prosperitylamps.com)

32W	26551m (25201m) @3000K 27201m (25851m) @4000K 28151m (26751m) @6500K
<b>性能</b>	
色容差	<6
色度坐标 [x, y]	0.44, 0.403@3000K / 0.38, 0.38@4000K / 0.312, 0.335@6500K
光效 [lm/W]	79-84
显色指数 [Ra]	≥80
R9 显色指数值	2
光束角 [°]	120
额定寿命, Ta@25° C [hrs]	25,000
灯残存率	0.9
光通量维持率	0.96
开关次数	15,000
启动时间 [S]	<0.5
预热时间 [S]	<2
前期失功率 (1000小时)	<5%
相移因数 [cos ]	0.7 / 0.7 / 0.7 / 0.9
频闪度 [Pst LM]	1
频闪效应指数 [SVM]	0.4
<b>尺寸和物料</b>	
直径 D [mm]	260 / 300 / 334 / 376
高度 H [mm]	52
物料	Body : Sheet steel with white finish Diffuser: Opaque acrylic
<b>标准</b>	
CE-LVD	EN60598-1, EN60598-2-2
CE-EMC	EN55015, EN61547, EN61000-3-2, EN61000-3-3
CE-EMF	EN62493
环保	RoHS
汞含量 [mg]	0.0
能源等级	F
<b>其他</b>	
调光 [Y/N]	N
工作温度	-10° C ~ 40° C
存储温度	-20° C ~ 60° C
开启模式下 1000小时耗电 [kWh/1000h]	14kWh / 20kWh / 24kWh / 32kWh