

LED 平板灯 ND161E-164E 20W/40W/75W


特点

- 20W / 40W / 75W LED 平板灯
- 磨砂 PC 板提供均匀光分布
- 舒适无眩光
- 可调光
- 良好的演色性, Ra ≥80



图表

尺寸:

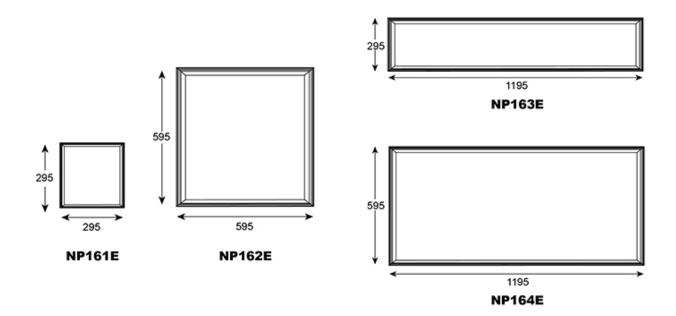



标准

 ϵ



IP20

应用

♪办公室













技术参数	
光源类型	
使用的照明技术	LED
非定向或定向 [NDLS/DLS]	DLS
	NMLS
	No
	No
灯罩 [No/Second/Non-Clear]	No
	No
	No
电参数	
· 额定功率 [W]	20W / 40W / 75W
	20W / 40W / 75W
 待机功率 [W]	N/A
	N/A
额定电压 [V/Hz]	220-240V, 50/60Hz
功率因数	0.95
输入电流 [mA] @230V	92 / 183 / 343
LED	SMD (480mA/960mA/1700mA)
产品型号	
NP161E-20W/8XX	20W
NP162E-40W/8XX	40W
NP163E-40W/8XX	40W
NP164E-75W/8XX	75W
光通量 (有效光通量) [lm]	
20W	1800lm (1710lm) @3000K
	1900lm (1805lm) @4000K
	2000lm (1900lm) @6500K
40W	38001m (36101m) @3000K
	39001m (37051m) @4000K
	40001m (38001m) @6500K
75W	70001m (66501m) @3000K
	7100lm (6745lm) @4000K

佑昌灯光器材有限公司

电话: (852) 2511 0022 传真: (852) 2511 0082 网址: www.prosperitylamps.com 电子邮件: info@prosperitylamps.com

	72001m (68401m) @6500K
性能	
	<6
色度坐标 [x, y]	0.44, 0.403@3000K / 0.38, 0.38@4000K / 0.312, 0.335@6500K
	86-91
显色指数 [Ra]	≥80
R9 显色指数值	2
	150
	50,000
破 率	>0.9
光通量维持率	>0.96
开关次数	25,000
启动时间 [S]	<0.5
预热时间 [S]	<2
前期失功率 (1000小时)	<5%
相移因数 [cos]	N/A
频闪度 [Pst LM]	N/A
频闪效应指数 [SVM]	N/A
尺寸和物料	
长度 L [mm]	295 / 595 / 295 / 595
宽度 W [mm]	295 / 595 / 1195 / 1195
物料	Body: Aluminium frame with white finish
	Diffuser: Frosted PC
标准	
CE-LVD	EN62560
CE-EMC	EN55015, EN61547, EN61000-3-2, EN61000-3-3
CE-EMF	EN62493
环保	RoHS
汞含量 [mg]	0.0
能源等级	F
其他	
调光 [Y/N]	No
工作温度	−10° C ~ 40° C
存储温度	−20° C ~ 60° C
开启模式下 1000小时耗电 [kWh/1000h]	20kWh / 40kWh / 75kWh